





●Type designation

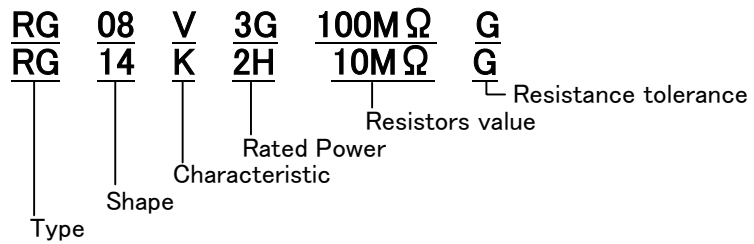


●Rating dimensions

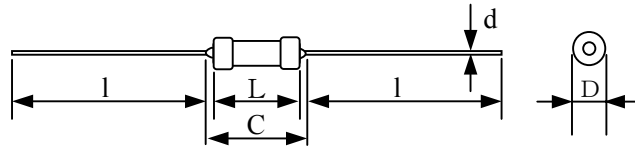

Exterior	Type	Rated Power (W) (70°C)	Highest usable Voltage (Kv)	Extreme Highest Overload Voltage (kV)	Dimensions (mm)					Applicable Temperature Range (°C)
					L	D	l	d	C	
The non-insulation form	RG08 2H	0.5	0.6	1.2	9±1.0	3±0.5	38±3	0.6±0.05	—	-40~+125
	RG08 2K	0.8	1	2	13±1.0	3±0.5	38±3	0.6±0.05	—	
	RG08 3C	1.6	1.5	3	15±1.5	5±0.5	38±3	0.8±0.05	—	
	RG08 3E	2.5	3	6	24±1.5	7.5±1.0	38±3	0.8±0.05	—	
	RG08 3G	4.0	5	10	52±1.5	7.5±1.0	38±3	0.8±0.05	—	
The simple insulation form	RG14 2E	0.25	0.3	0.6	6.3±0.5	2.3±0.2	27±2	0.6±0.05	Equal to or less than 7.5	
	RG14 2H	0.5	0.6	1.2	9.0±0.8	3.6±0.5	27±2	0.6±0.05	Equal to or less than 10.5	
	RG14 2K	0.8	1	2	13.5±1.0	3.6±0.5	38±3	0.6±0.05	Equal to or less than 15.0	
	RG14 3C	1.6	1.5	3	16±1.5	5.5±0.5	38±3	0.8±0.05	Equal to or less than 18.5	

●Derating curve

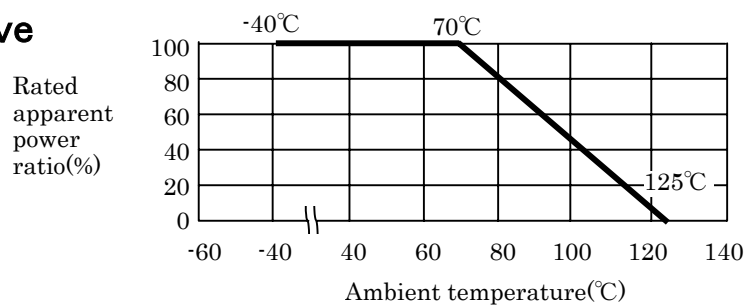

●Resistance temperature characteristic

 $T \cdot C \cdot R \text{ (ppm/°C)}$

Symbol	K	V
Resistance temperature characteristic	±100	±300

●Resistance tolerance

Symbol	F	G	J
Resistance tolerance (%)	±1	±2	±5