





### ●Features

- (1) Vary small variation with the highest degree of stability.
- (2) Superior resistance tolerance :  $\pm 0.01\%$
- (3) Very low temperature coefficients :  $\pm 5, \pm 10 \text{ ppm}/^\circ\text{C}$

### ●Type designation

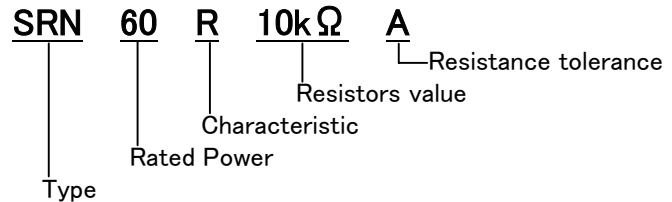


### ●Rating dimensions

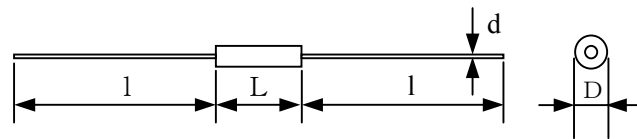

Type	Rated power (W) (70°C)	Highest usable voltage (V) (70°C)	Extreme highest overload voltage (V)	Dimensions (mm)				Applicable temperature range (°C)
				L	D	l	d	
SRN55	0.1	200	400	6.6 $\pm$ 0.5	3.4 $\pm$ 0.2	38 $\pm$ 3	0.6 $\pm$ 0.05	-55~+125
SRN60	0.125	250	500	10.5 $\pm$ 0.5	3.9 $\pm$ 0.2	"	"	
SRN65	0.25	300	600	16.0 $\pm$ 0.5	5.3 $\pm$ 0.3	"	"	
SRN70	0.5	350	700	20.0 $\pm$ 0.5	6.5 $\pm$ 0.5	"	0.8 $\pm$ 0.05	

### ●Derating curve

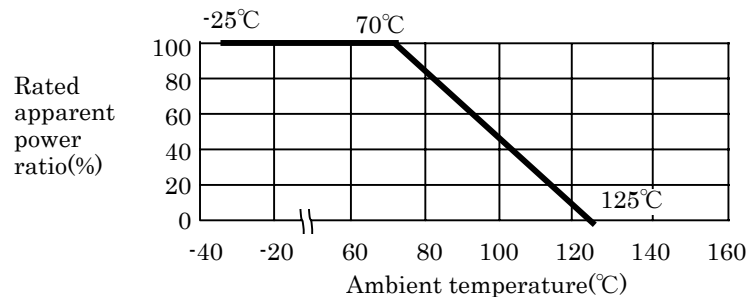

### ●Resistance temperature characteristic T·C·R (ppm/°C)

Symbol	R	S
Resistance temperature characteristic	$\pm 5$	$\pm 10$

Note 1 The guaranteed temperature range of TCR is from 0°C to 70°C in the case of R and S.

### ●Resistance tolerance

Symbol	T	E	A
Resistance tolerance (%)	$\pm 0.01$	$\pm 0.025$	$\pm 0.05$