

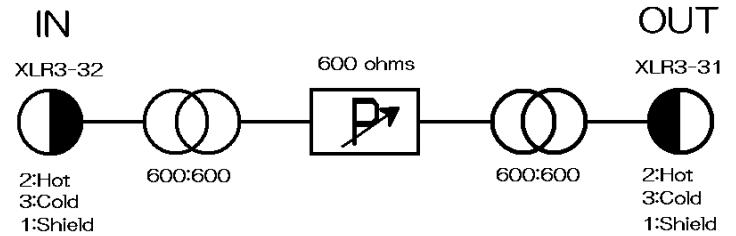


FUB-2000



Block Diagram

Dimensions

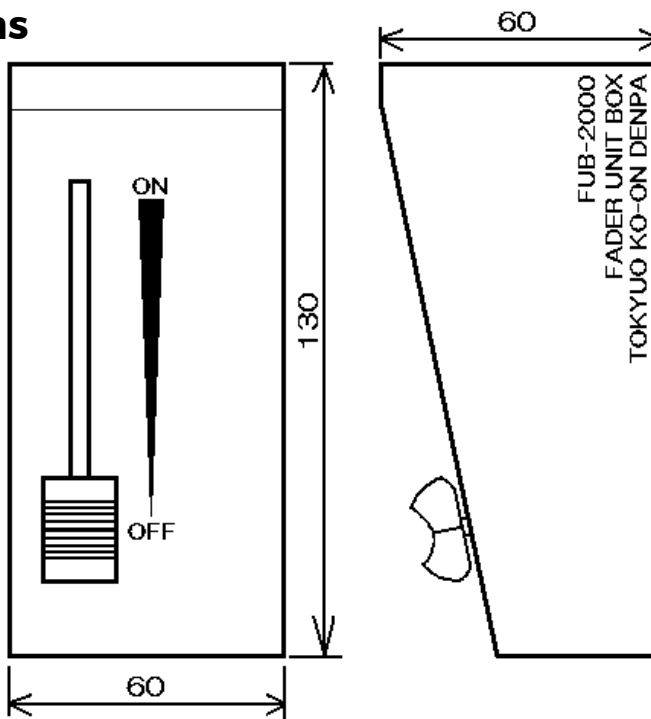

Rear panel

Specifications

Transmission frequency	30Hz ~ 20KHz
Circuit	Balanced (with phantom power supply)
Insertion loss	≤ 3 dB
Impedance	600 ohms
Maximum input level	+5dBm
Attenuation	≥ 80 dB
Connector	Canon (European)
Weight	600g
Measurement	60(W) x 60(H) x 130(D)