

2CP-2531WS (Attenuator)

ATTENUATOR

Conductive Plastic


Low rotational noise level

With snap action switch


Available for various control

Cut off click

315degrees (Cut off + Switch on)

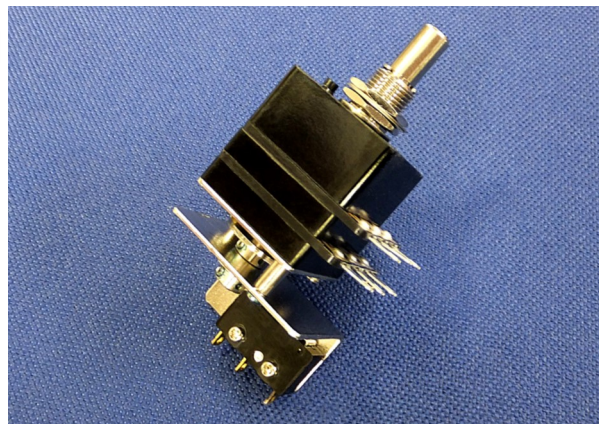

Dimensions

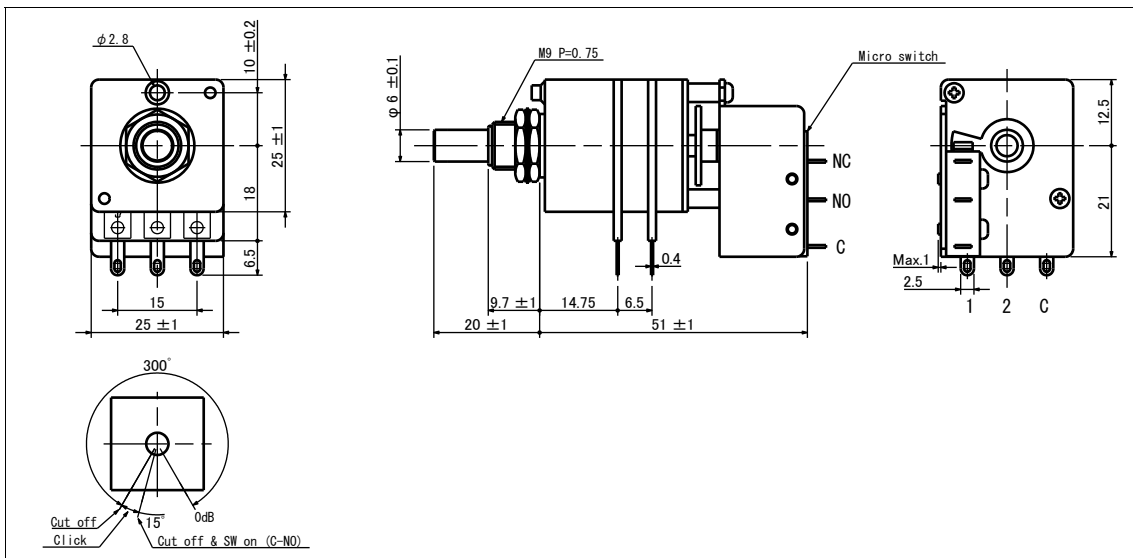

Output Law Load: High impedance (More than 20 times of total resistance.)

Degrees (CW-CCW)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270	285	300	315
Attenuation [dB]	0	2	4	6	8	10	12	14	16	18	20	22	24	27	30	33	37	42	48	58	Cut off	Cut off (SW on)

↔ Click

Model number

2

Number of circuit
2 circuits only


CP-2531WS

Product type

- **10K**

Total resistance

Circuit method

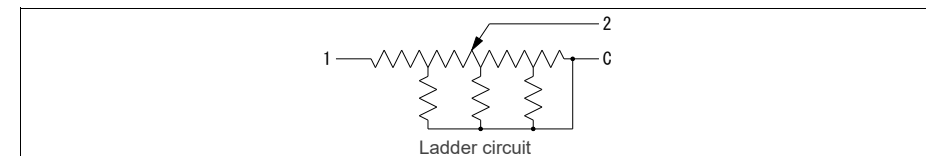

Electrical specifications

	2CP-2531WS
Circuit (Unbalanced)	Ladder circuit
Attenuation direction	CCW (Large attenuation & cut off) - CW (Small attenuation)
Total resistance (1-C)	10k, 50k, 100kohm
Total resistance tolerance	±20%
Attenuation accuracy	0~10dB: ±1.0dB, ~30dB: ±2.0dB, ~42dB: ±3.0dB
Matching accuracy	0~10dB: 1.0dB, ~30dB: 1.5dB, ~42dB: 2.5dB
Insertion loss	0.5dB or less
Cut off (15kHz)	85dB Min.
Voltage proof	1 Min. at AC500V
Insulation resistance	50Mohm or more at DC500V
Max rating	0.1W
Rotational noise level	47mV or less (by JIS C 6443)
Rotational life	100,000 Cycles Min. (18cycles/min, Sliding noise level: Less than 100mV)
Contact capacity (Snap action switch)	AC125V 5A, AC250V 3A (SS-5GL13 OMRON Corporation)

Mechanical specifications

	2CP-2531WS
Operating angle	315 degrees ±5 degrees
Rotational torque	3Ncm ±0.5Ncm
Click torque	5Ncm ±0.5Ncm
Strength of Nut-Attached	50Ncm
Attached Parts	Hexagonal nut (M9)
Stopper strength	50Ncm
Push-pull strength	50N

General specifications

	2CP-2531WS
Temp. range	-10 to +70 degrees C (Operating), -15 to +75 degrees C (Storage)
Relative humidity	90%RH (No condensation)

Note

- * This product is constructed by a ladder circuit. Cannot use it for a rheostat use (a use to change a resistance level).
- * Solder heat resistance: 350degrees C max, 5sec max, to 2 times. (Manual soldering only)
- * Special order of the shaft length is possible. Please contact us for details.