

CP28-S (Attenuator)

ATTENUATOR

Conductive Plastic


Low rotational noise level

Rotary angle 315 degrees


Wider adjustment range

Shielded between circuits

Shield plate behind resistor board as standard equipment

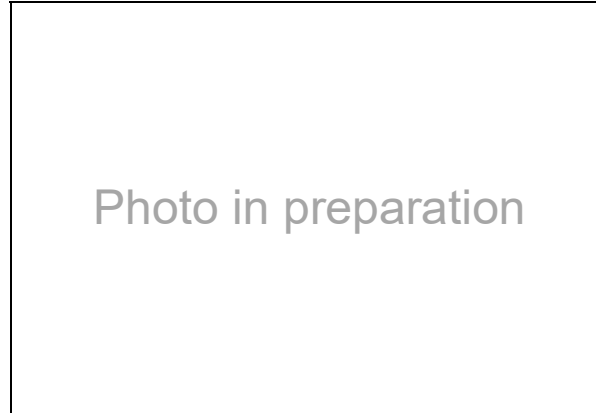

Dimensions

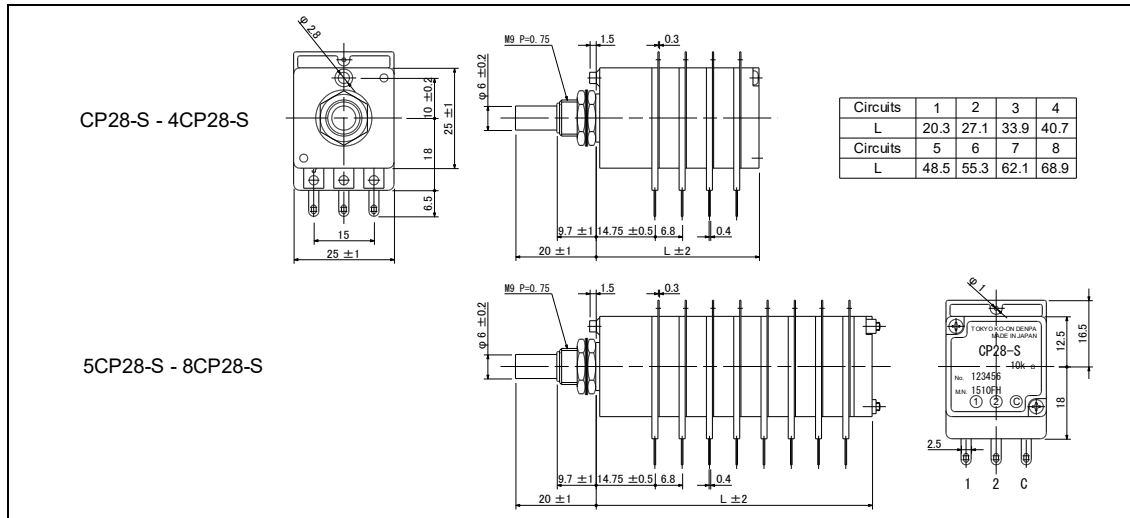

Output Law

Load: High impedance

Degrees (CW-CCW)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270	285	300	315
Attenuation [dB]	0	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	37	42	50	Cut off

Model number

2

Number of circuit
(2~8)
Blank: single circuit

CP28

Product type

S

Mechanical click option
Blank: Without click
S: With click (15degrees step)


- **10K**

Total resistance

- **S**

With shield plate

Circuit method

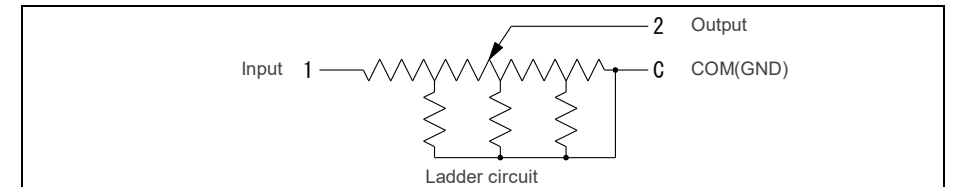

Electrical specifications

	CP28-S
Circuit (Unbalanced)	Ladder circuit
Attenuation direction	CCW (Large attenuation & cut off) - CW (Small attenuation)
Total resistance (1-C)	5k, 10k, 50k, 100kohm
Total resistance tolerance	±20%
Attenuation accuracy (Load: high)	0~10dB: ±1.0dB, ~30dB: ±2.0dB, ~42dB: ±3.0dB
Matching accuracy	0~10dB: 1.0dB, ~30dB: 1.5dB, ~42dB: 2.5dB
Insertion loss	0.5dB or less
Cut off (15kHz)	85dB Min.
Voltage proof	1 Min. at AC500V
Insulation resistance	50Mohm or more at DC500V
Max rating	DC20V (0.1W)
Rotational noise level	47mV or less (by JIS C 6443)
Rotational life	100,000 Cycles Min. (18cycles/min, Sliding noise level: Less than 100mV)

Mechanical specifications

	CP28-S
Operating angle	315 degrees ±5 degrees
Rotational torque	0.1~1.5Ncm (Different by number of circuit)
Strength of Nut-Attached	50Ncm
Attached Parts	Hexagonal nut (M9)
Stopper strength	50Ncm
Push-pull strength	50N

General specifications

	CP28-S
Temp. range	-10 to +70 degrees C (Operating), -15 to +75 degrees C (Storage)
Relative humidity	90%RH (No condensation)

Note

- * This product is constructed by a ladder circuit. Cannot use it for a rheostat use (a use to change a resistance level).
- * Solder heat resistance: 350degrees C max, 5sec max, to 2 times. (Manual soldering only)
- * Special order of the shaft length is possible. Please contact us for details.