

**TRB - 1000**



Numbering System

**TRB - 1 0 0 1**

① ② ③

① : **Type of connector**

0-----With XLR connector

1-----With XLR connector and RCA connector(10kΩ)

② : **Kind of connector**

To ① when you select 0

0-----XLR-3-31-F77 and XLR-3-32-F77

1-----XLR-3-31-F77 2 piece

2-----XLR-3-32-F77 2 piece

To ① when you select 1

1-----XLR-3-31-F77 and RCA connector


2-----XLR-3-32-F77 and RCA connector

③ : **Impedance of transformer**

1-----600 Ω : 600 Ω

2-----10 k Ω : 600 Ω

**Dimensions**

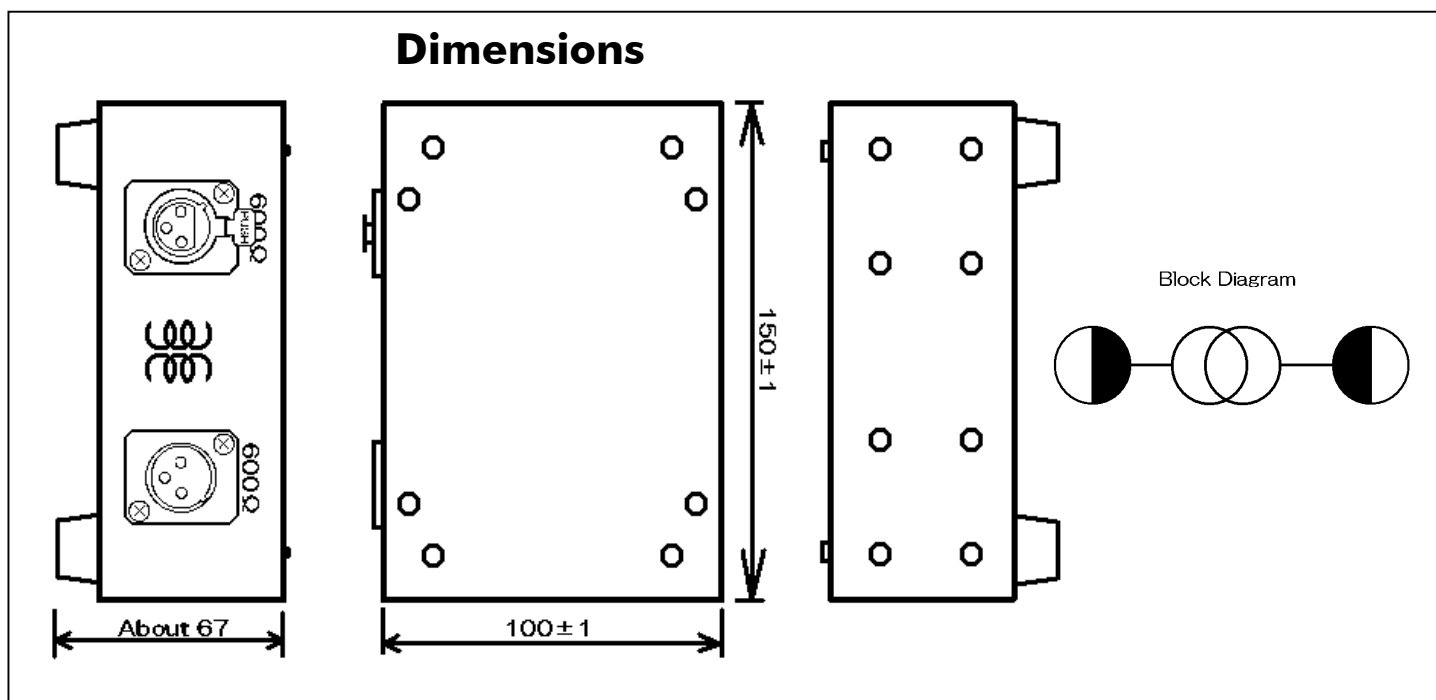

Specifications

	TRB-1xx1	TRB-1xx2
Frequency range	20Hz ~ 20KHz	
Impedance	600 ohms ±2%	600 ohms ±2% 10k ohms ±2%
Max input level	+23dBm	
Insulation resistance	≥100Mohms at DC500V	
Measurement	150(W) x 67 (H) x 100 (D) mm	